



Solid state LASERS mostly rely on single crystalline transparent bodies as the active LASER medium, which is pumped by flash lamps. Recently, some LASER types take advantage of the application of ceramic discs or bodies, since transparent ceramics broaden the range of applicable material compositions. Solid state LASERS using (Al,In,Ga)N or (Al,In,Ga)P semiconductors as active media are well-established for the blue and red spectral range. Green emitting semiconductor LASERS with high power are not feasible yet. A potential way to achieve green emitting solid state LASERS is the application of blue LASER diodes, which pump a green emitting (520 - 540 nm) LASER crystal or ceramic.

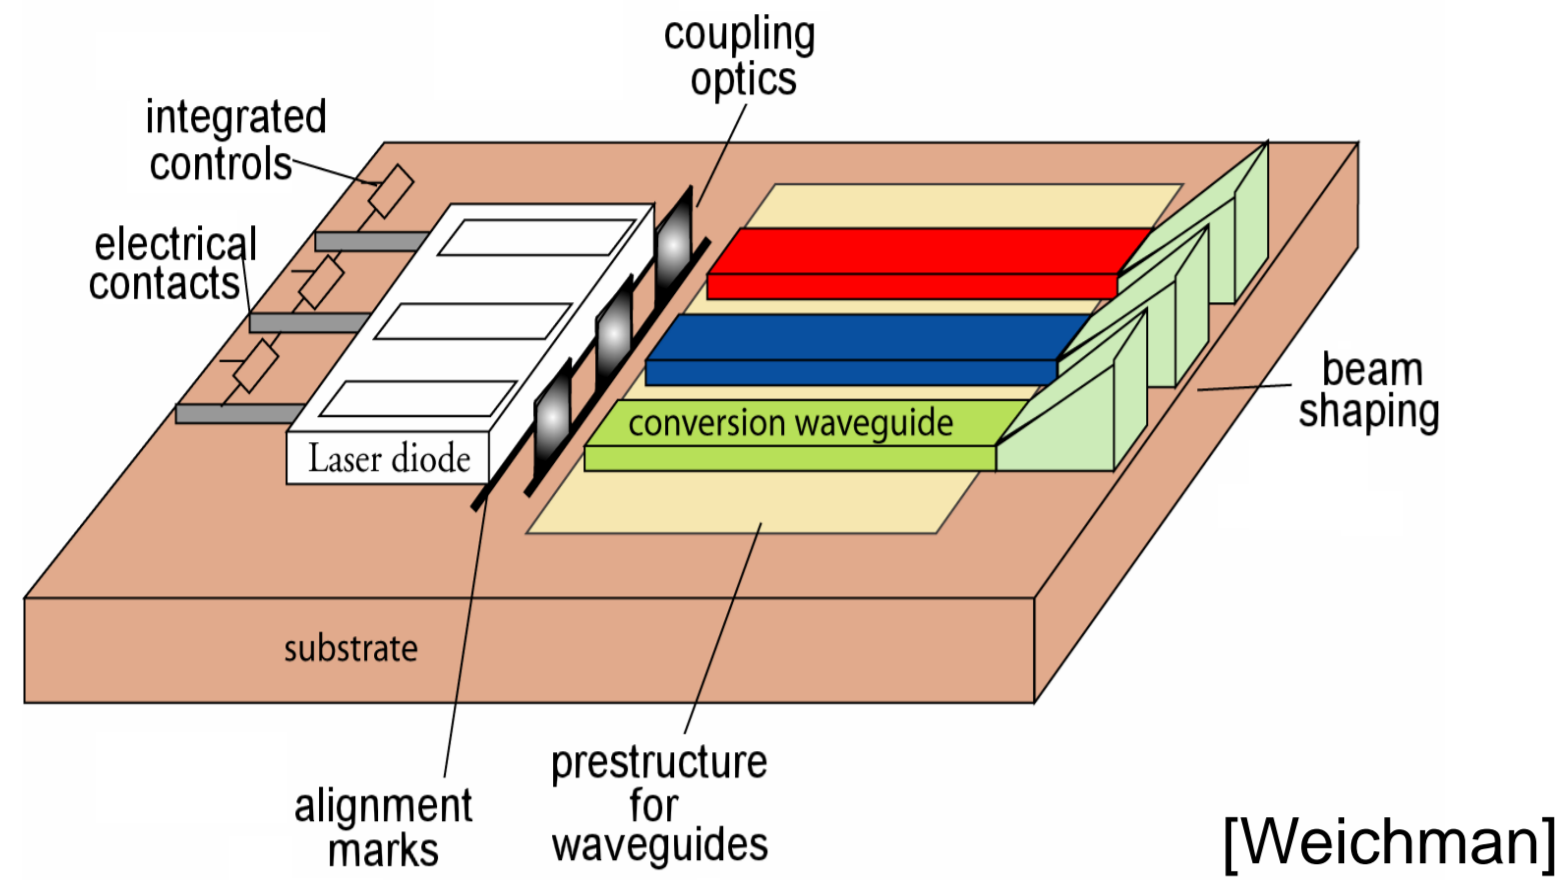


[Weichman]

Integrated RGB Laser source

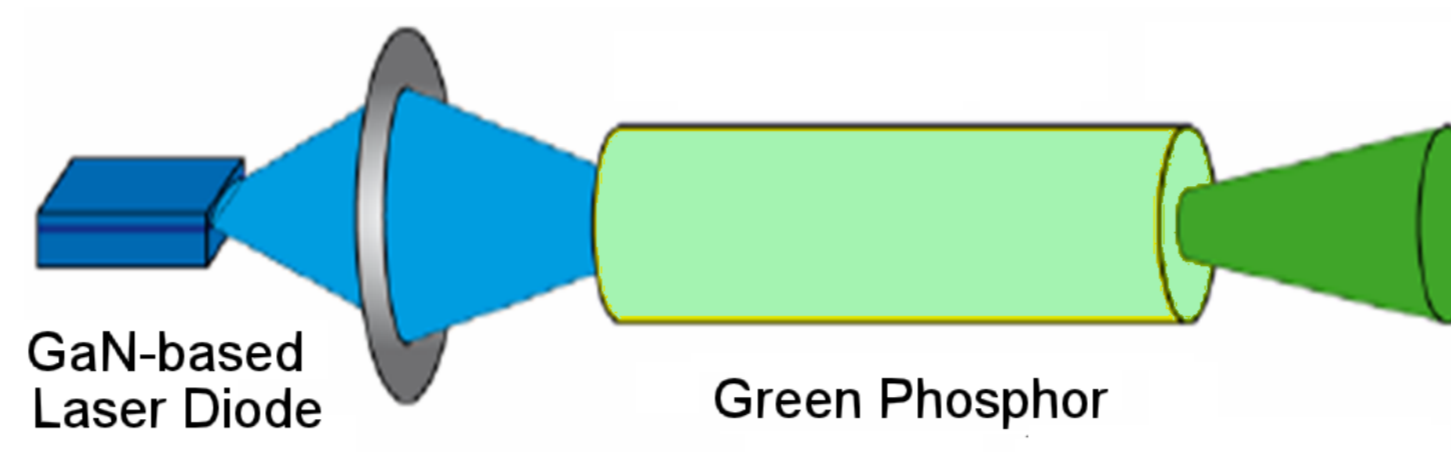


Green phosphor for the conversion of blue light

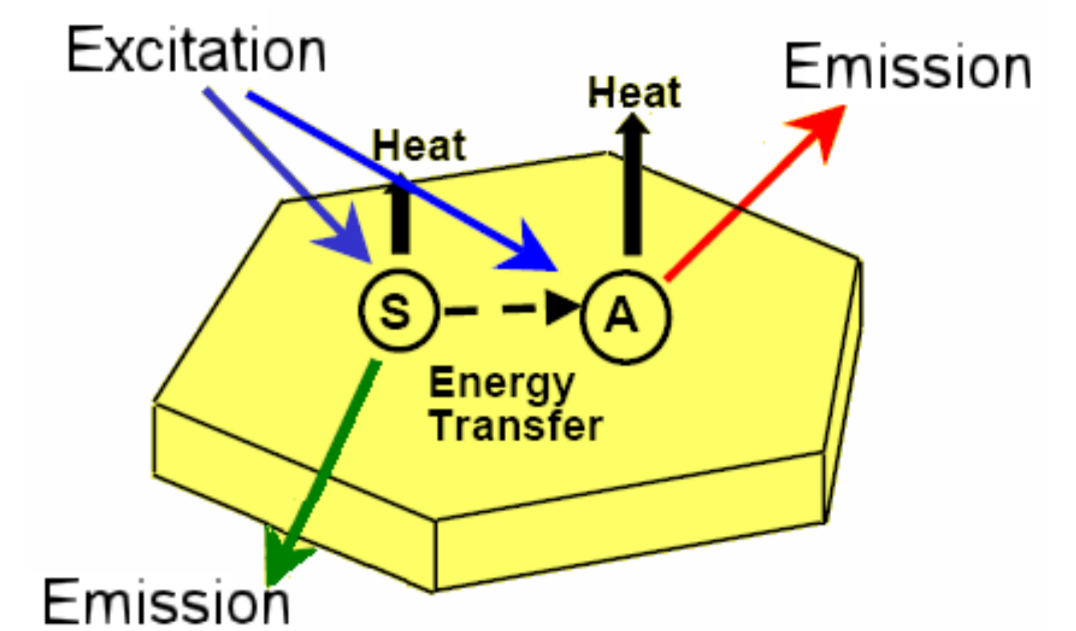

Phosphor = crystalline host lattice doped by an activator


By the realisation of a green emitting solid state LASER, an RGB projector using an RGB LASER set will become feasible. This requires green emitting luminescent materials, which can be pumped by blue radiation and which are not suspected to show excited state absorption. Ba₂LaF₇ (BLF) crystallising in the cubic crystal system is of high interest for the production of transparent ceramics due to its isotropic refractive index.

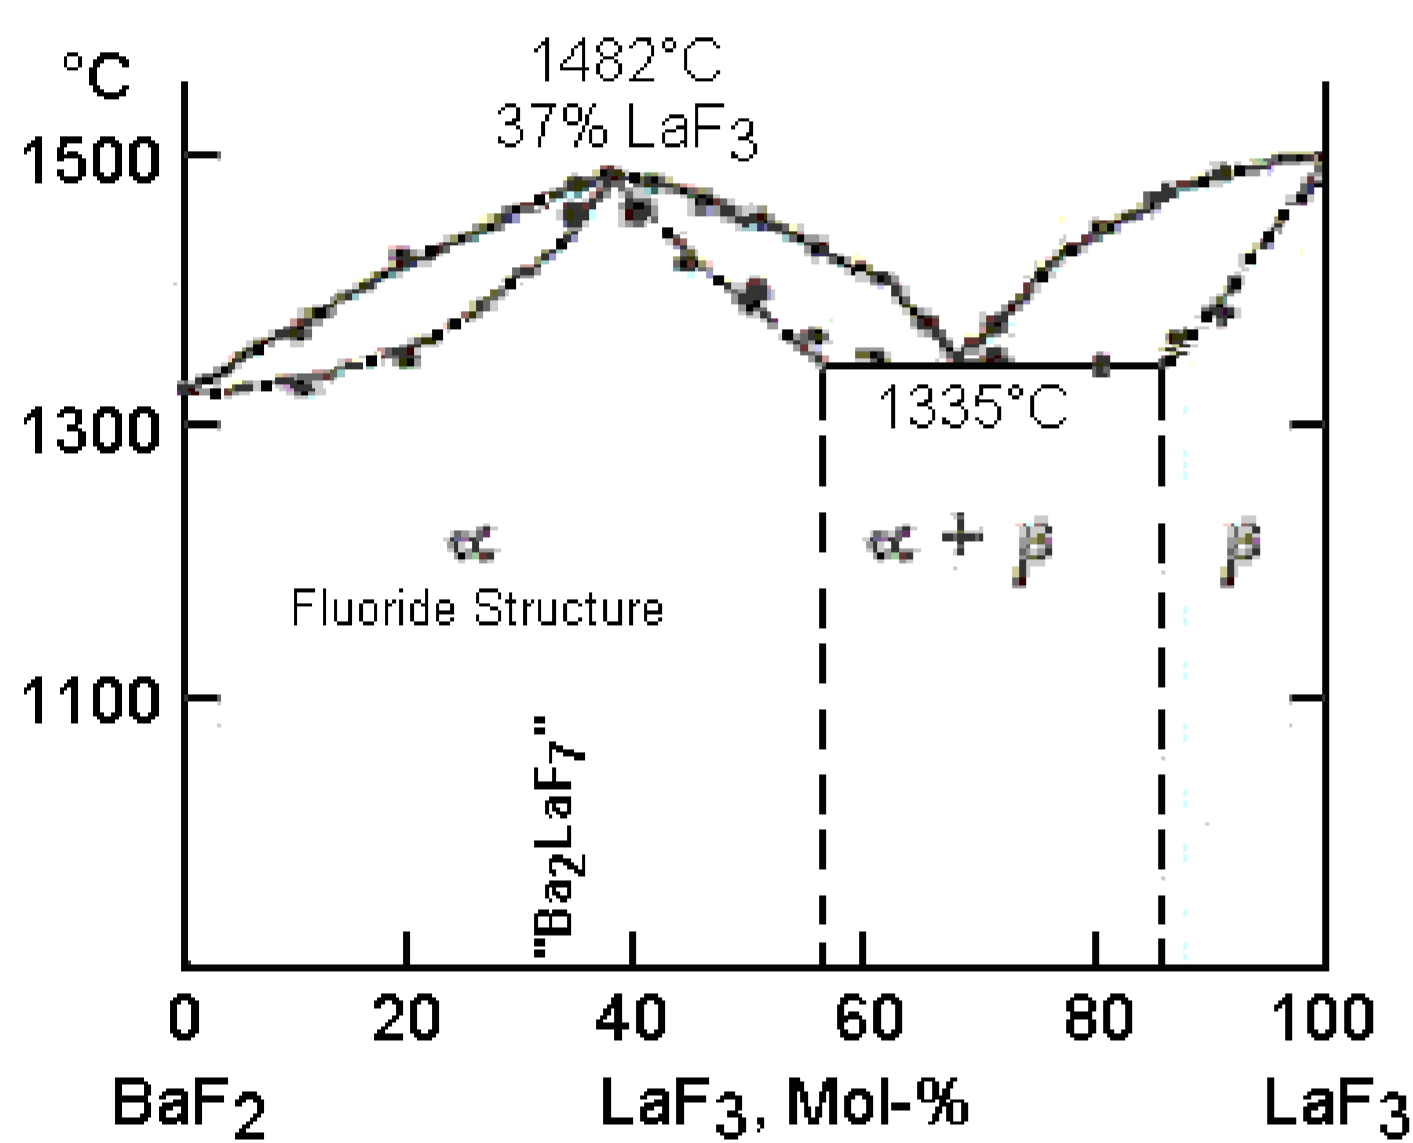

Phase diagram of BaF₂-LaF₃

B.M. Zhigarnovskii, E.G. Ippolito, Neorg. Mater., 5 (1969) 1806

Solid solution of Ba_{1-x}La_xF_{2+3x} for x = 1/3 or compound Ba₂LaF₇

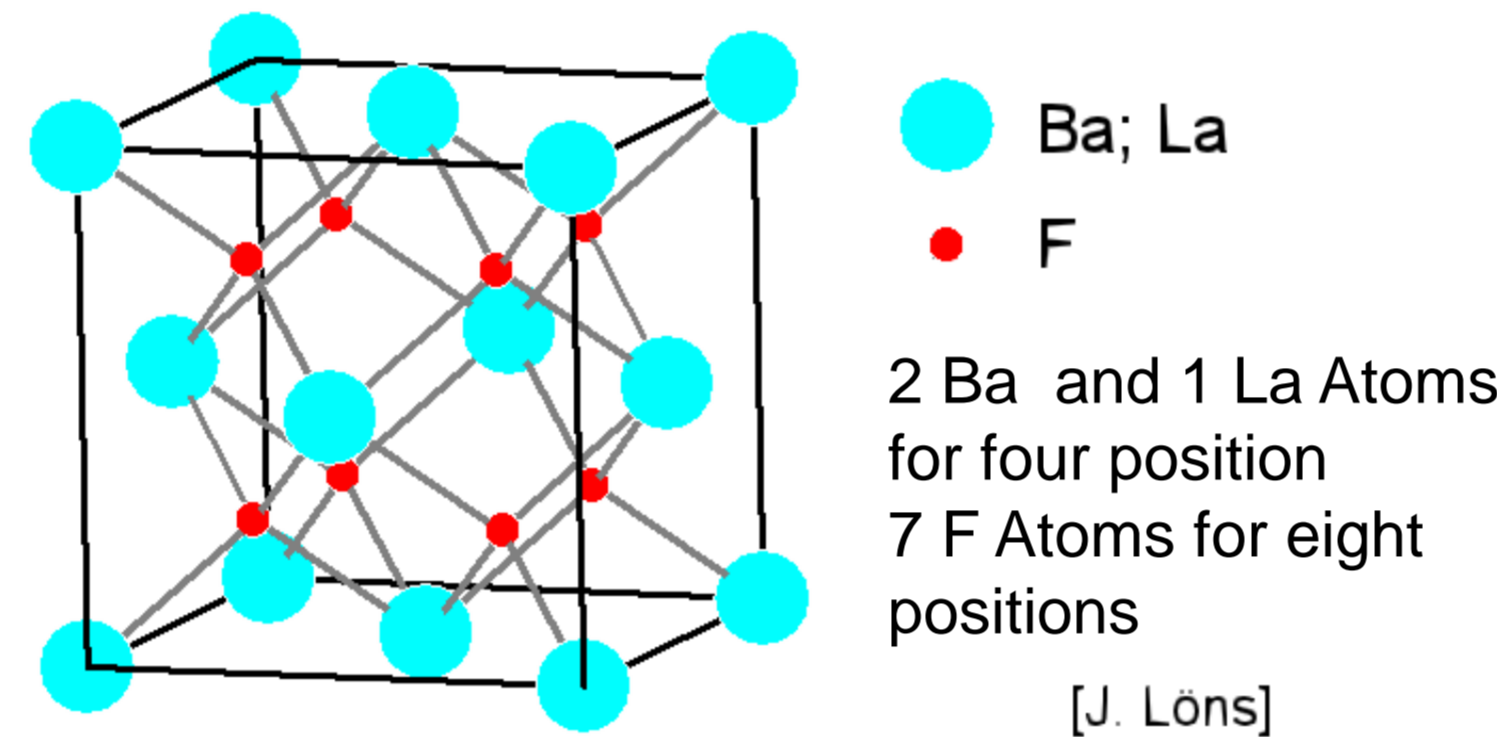


Defect structure of Ba₂LaF₇; cubic, a = 0.6088 nm (proposal)



| RE-Ion | Electron configuration | Ground state | Ion radius (CN = 8) |
|------------------|--|-------------------------------|---------------------|
| Pr ³⁺ | 4f ² 5s ² 5p ⁶ | ³ H ₄ | 126,6 pm |
| Er ³⁺ | 4f ¹¹ 5s ² 5p ⁶ | ⁴ I _{5/2} | 114,5 pm |
| Ho ³⁺ | 4f ¹⁰ 5s ² 5p ⁶ | ⁵ I ₃ | 115,5 pm |
| La ³⁺ | [Xe] | ¹ S ₀ | 117,2 pm, |

Activator ions


Samples as prepared in this work were made by the ceramic method in a reducing atmosphere, i.e. under CO, at about 1350 °C. To explore the luminescence spectra, BLF were doped by 0,5 to 1,0% of Pr³⁺, Ho³⁺, or Er³⁺. Emission spectra reveal that all samples show efficient luminescence in the green spectral range due to 4f-4f transitions of the respective trivalent rare earth ion.

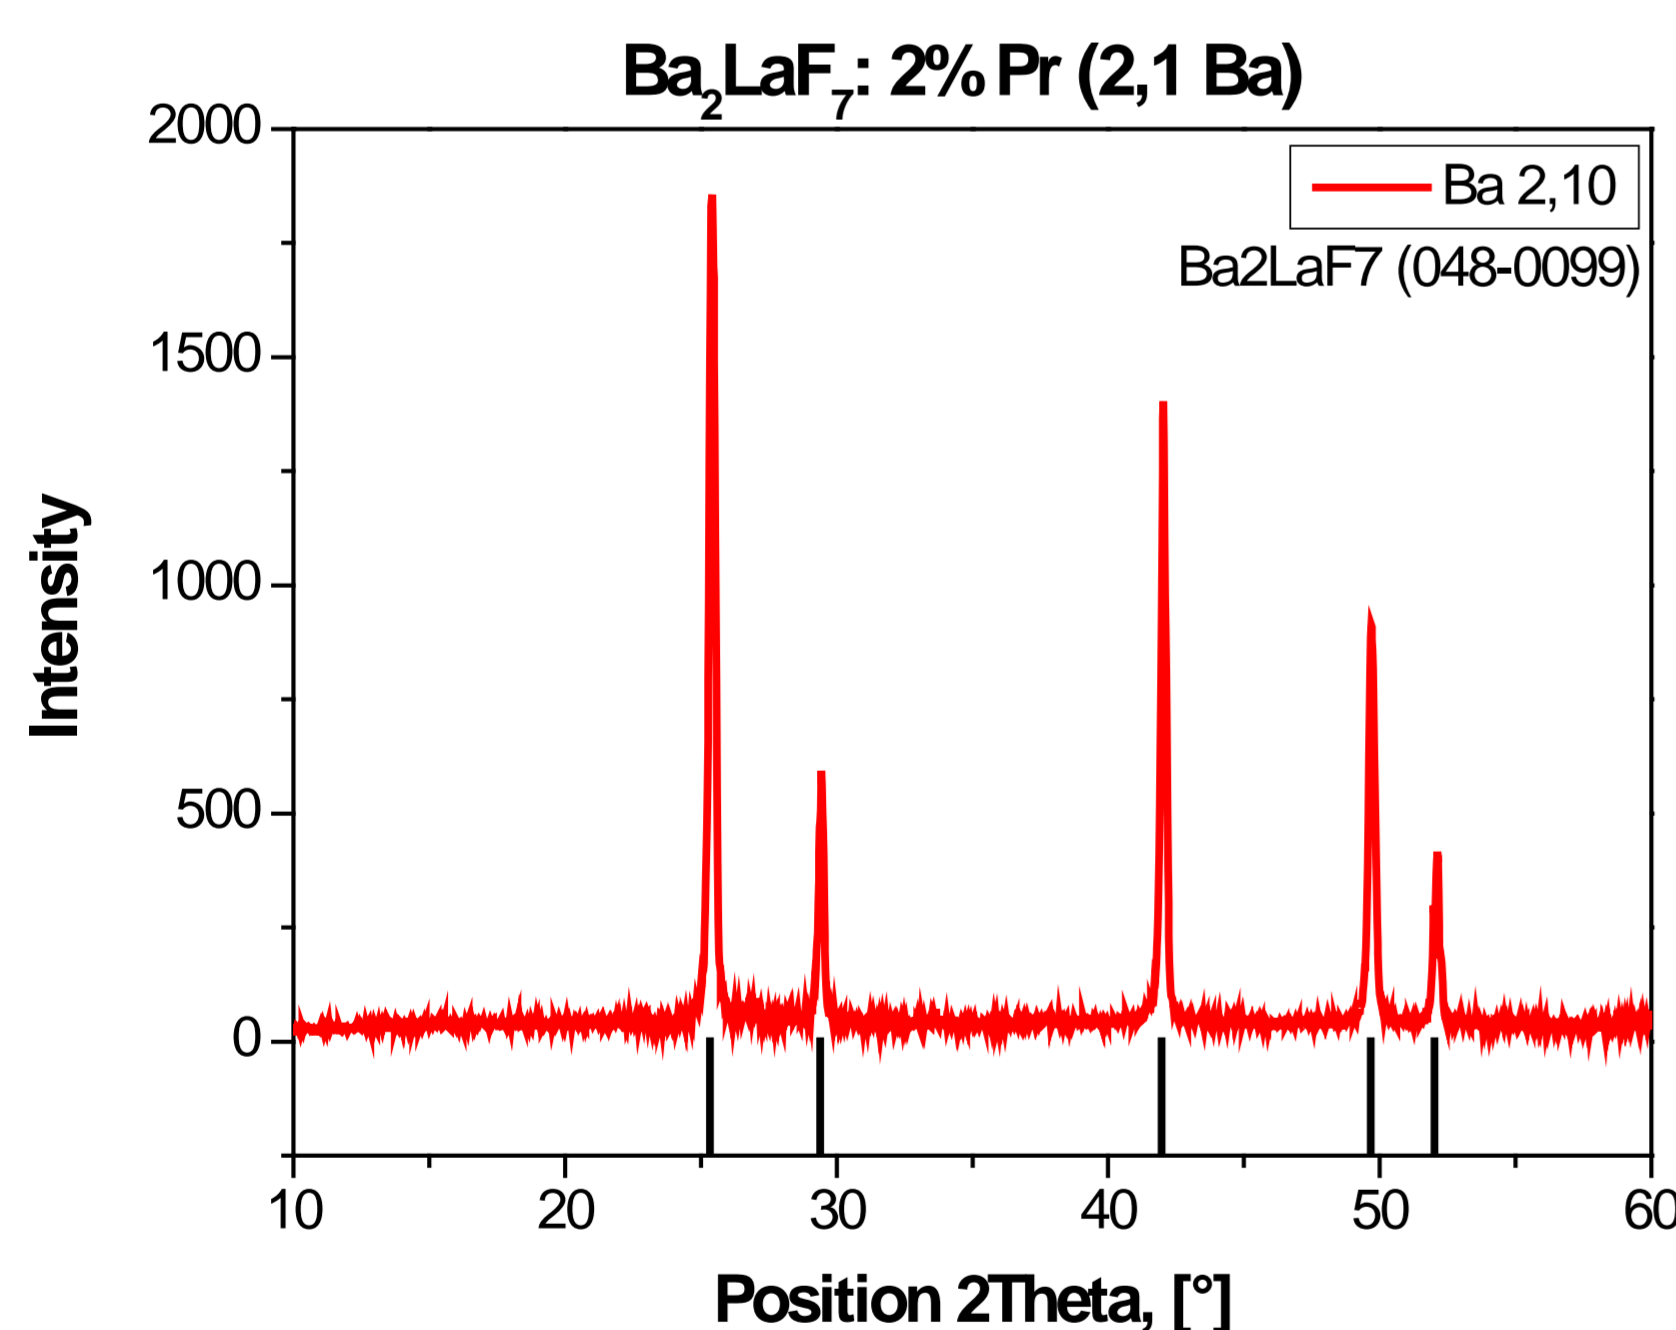


XRD Analysis

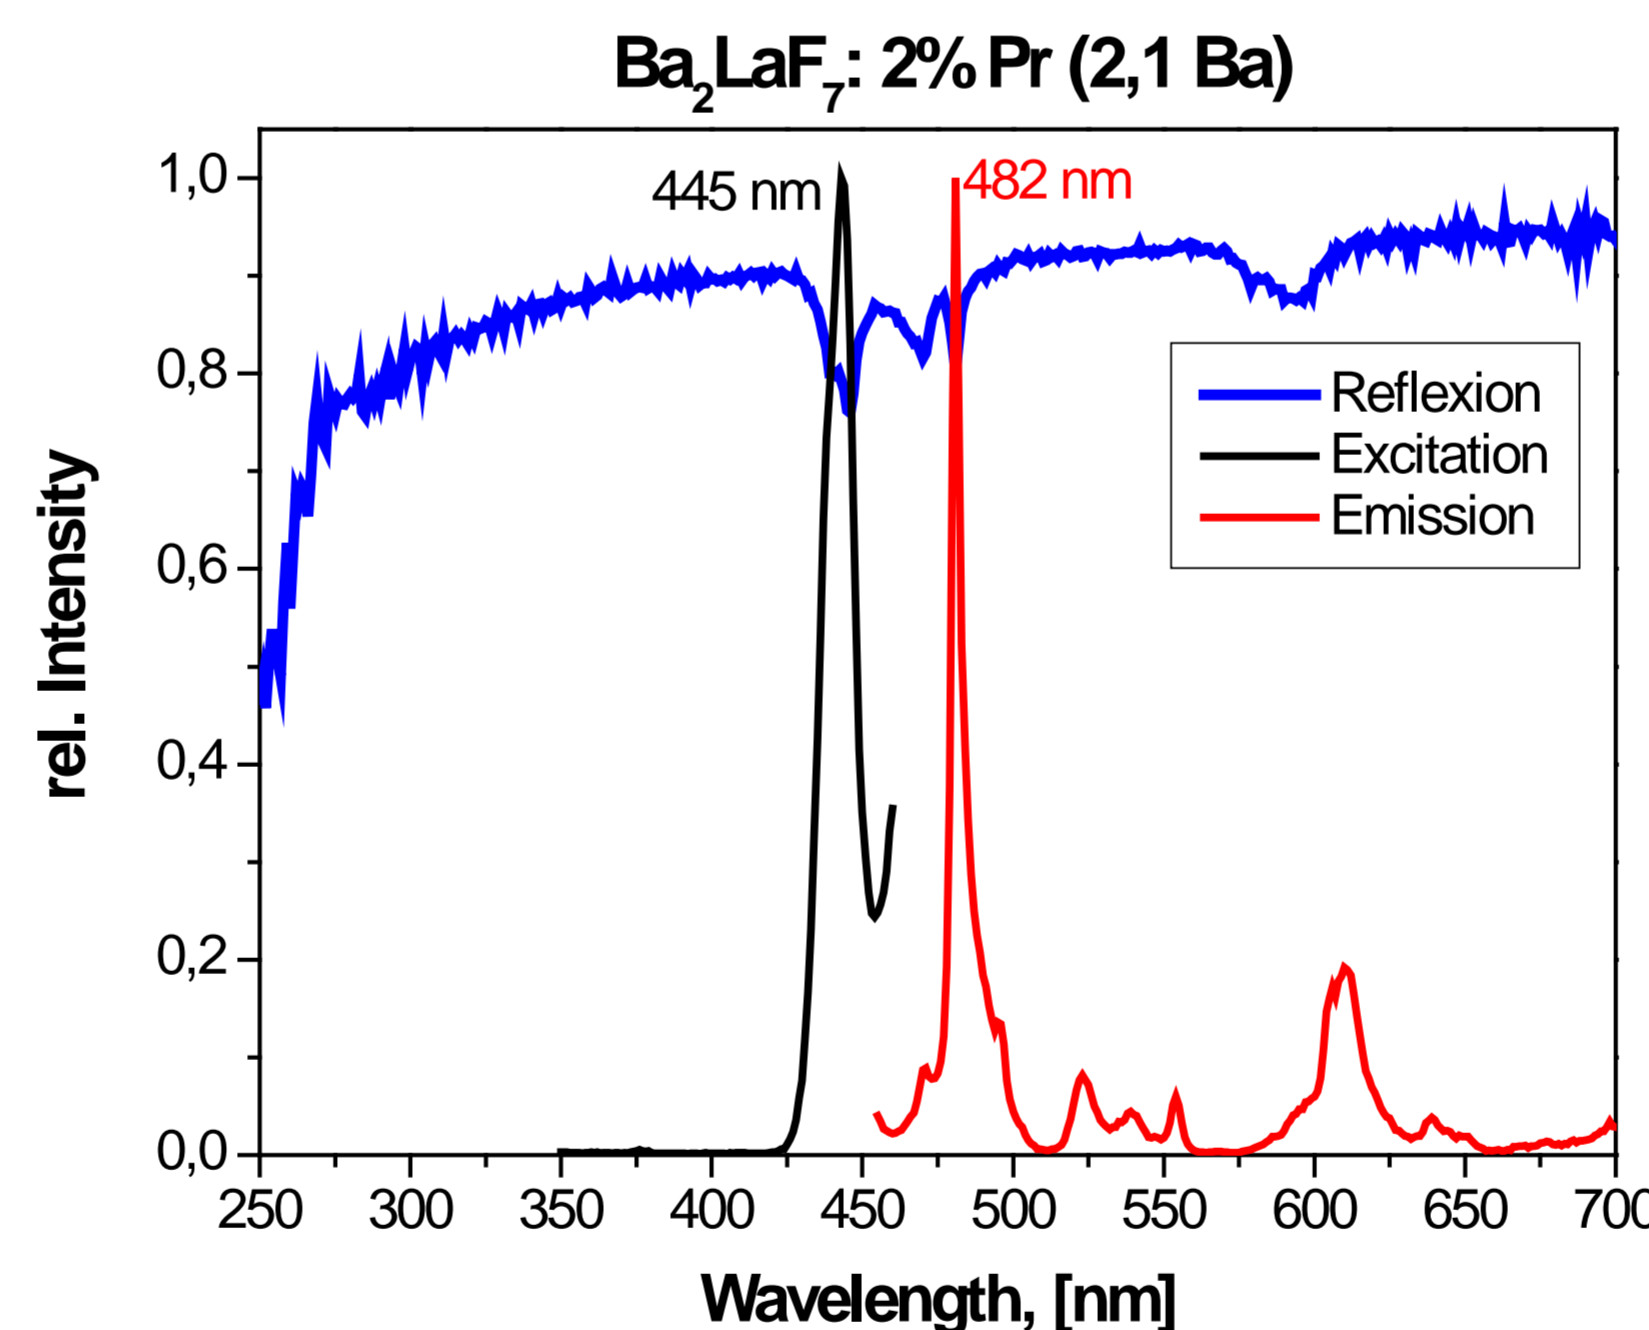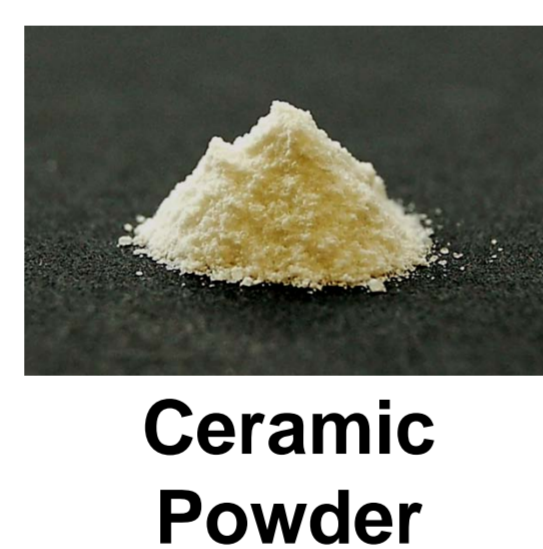


Optical spectra

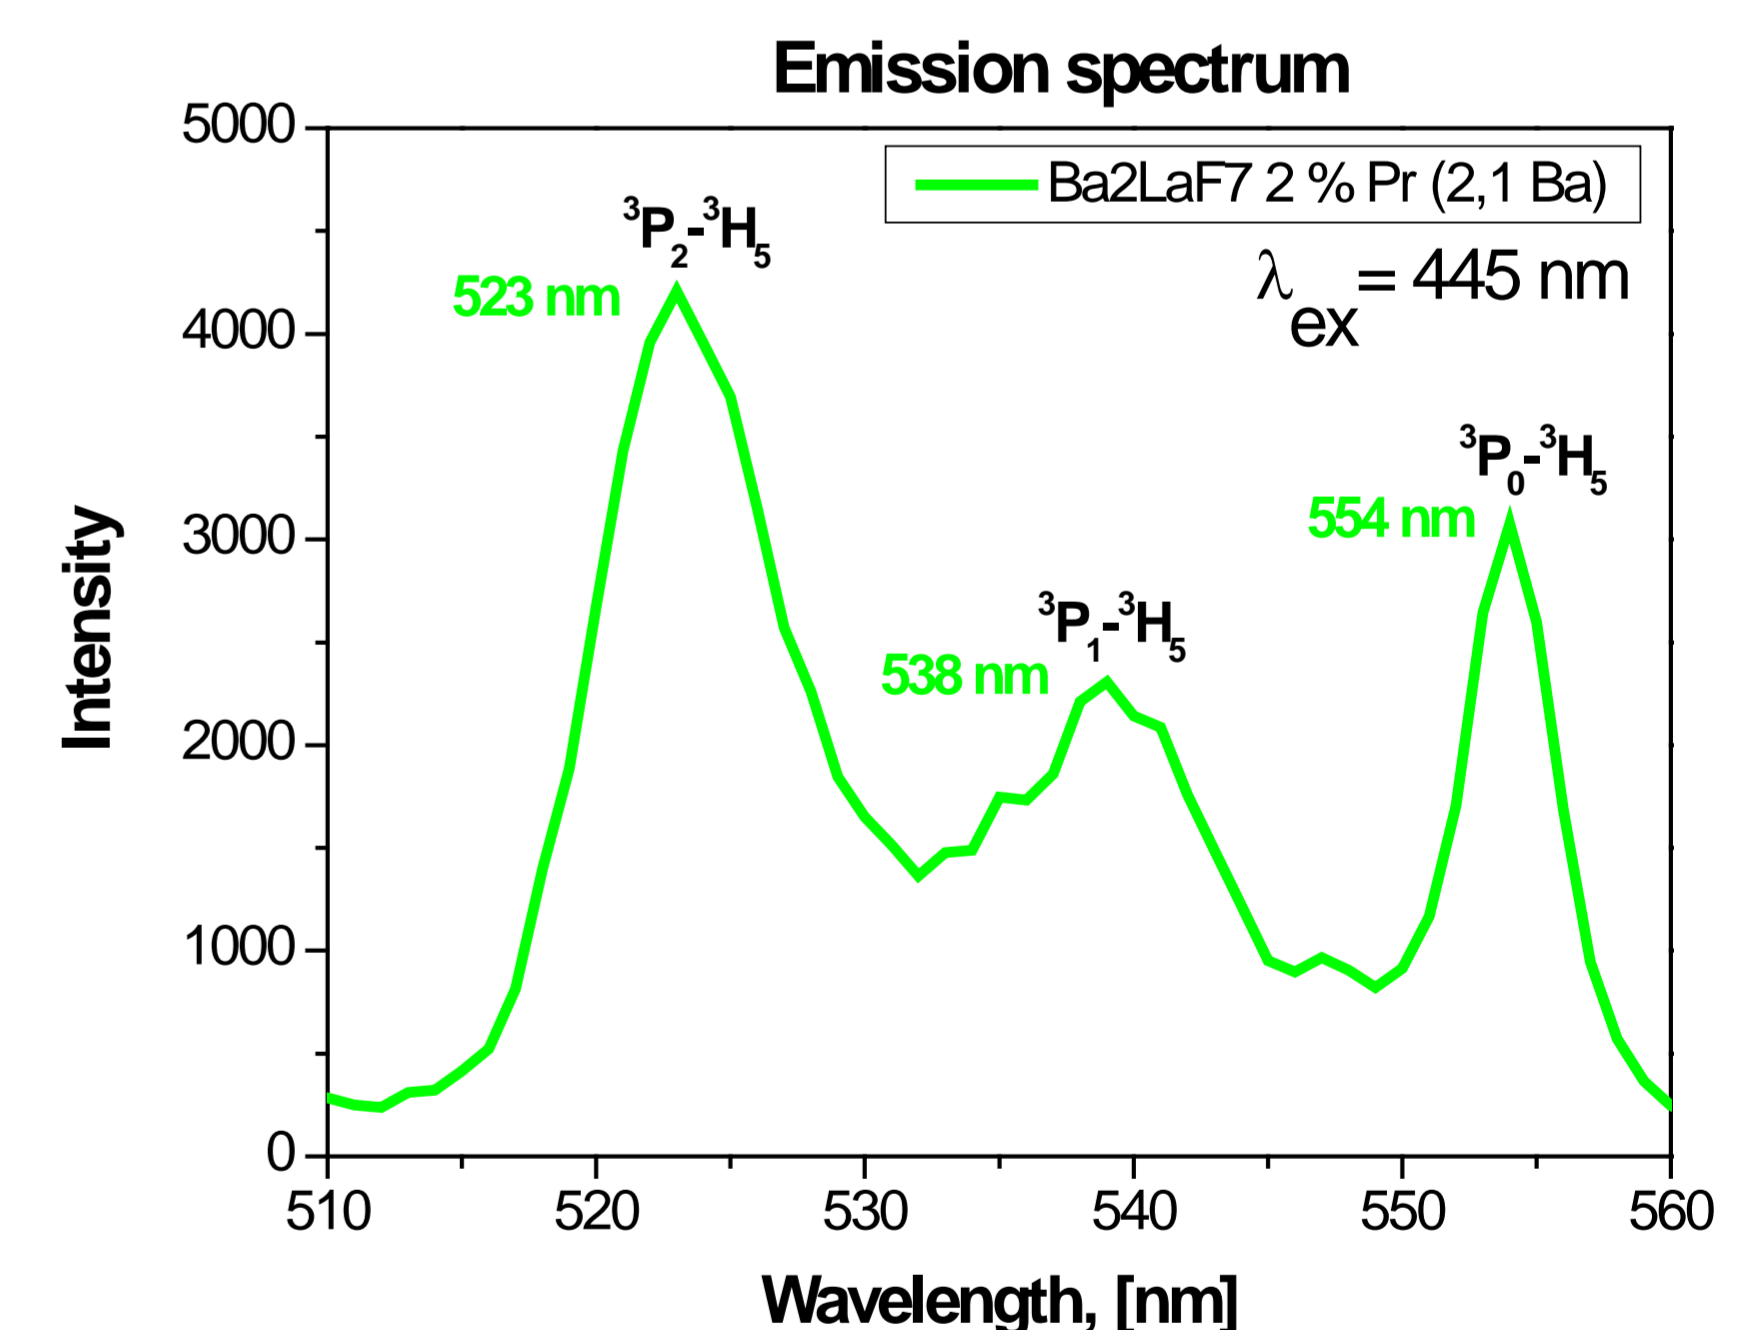


Green emission range

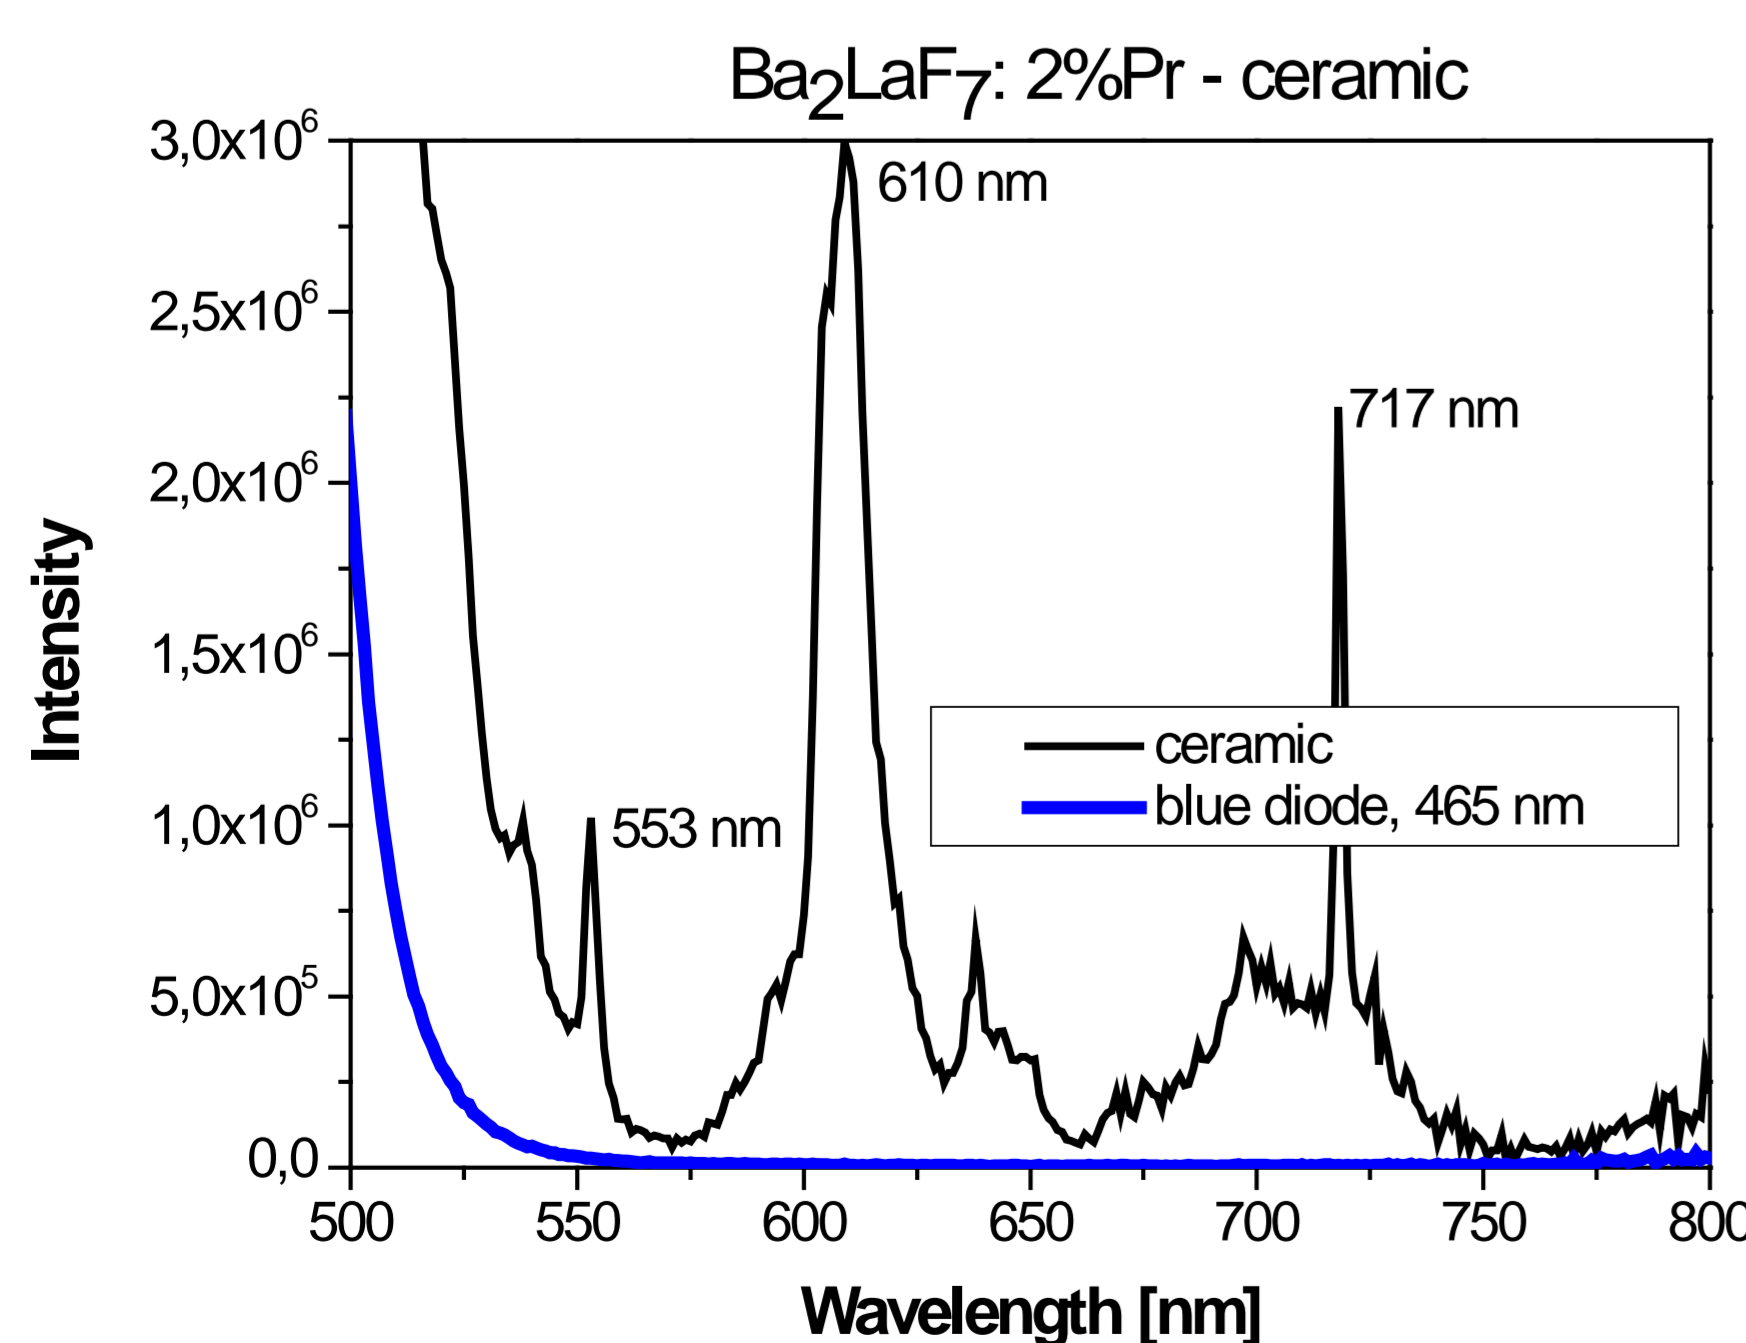

Ceramic sample under blue diode

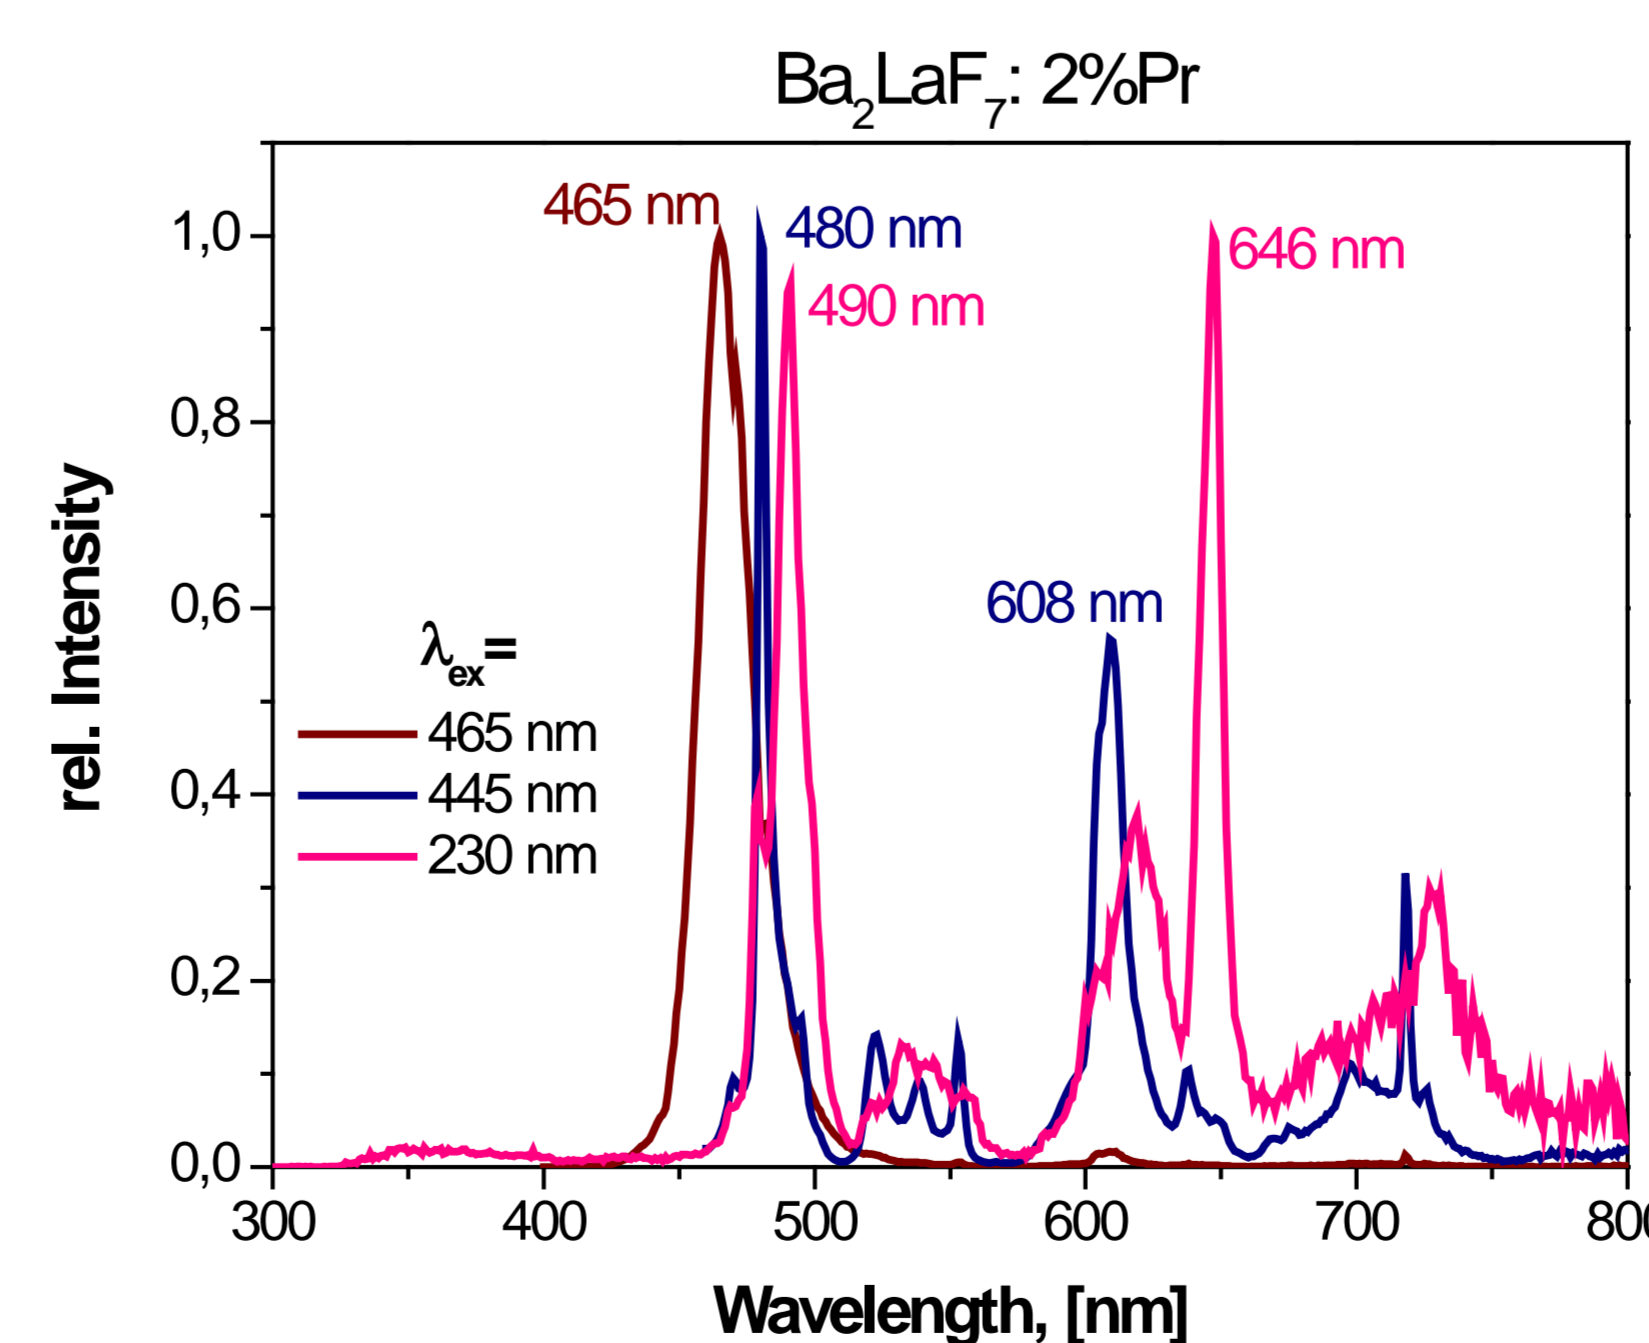

Effect of the excitation wavelength on emission spectra

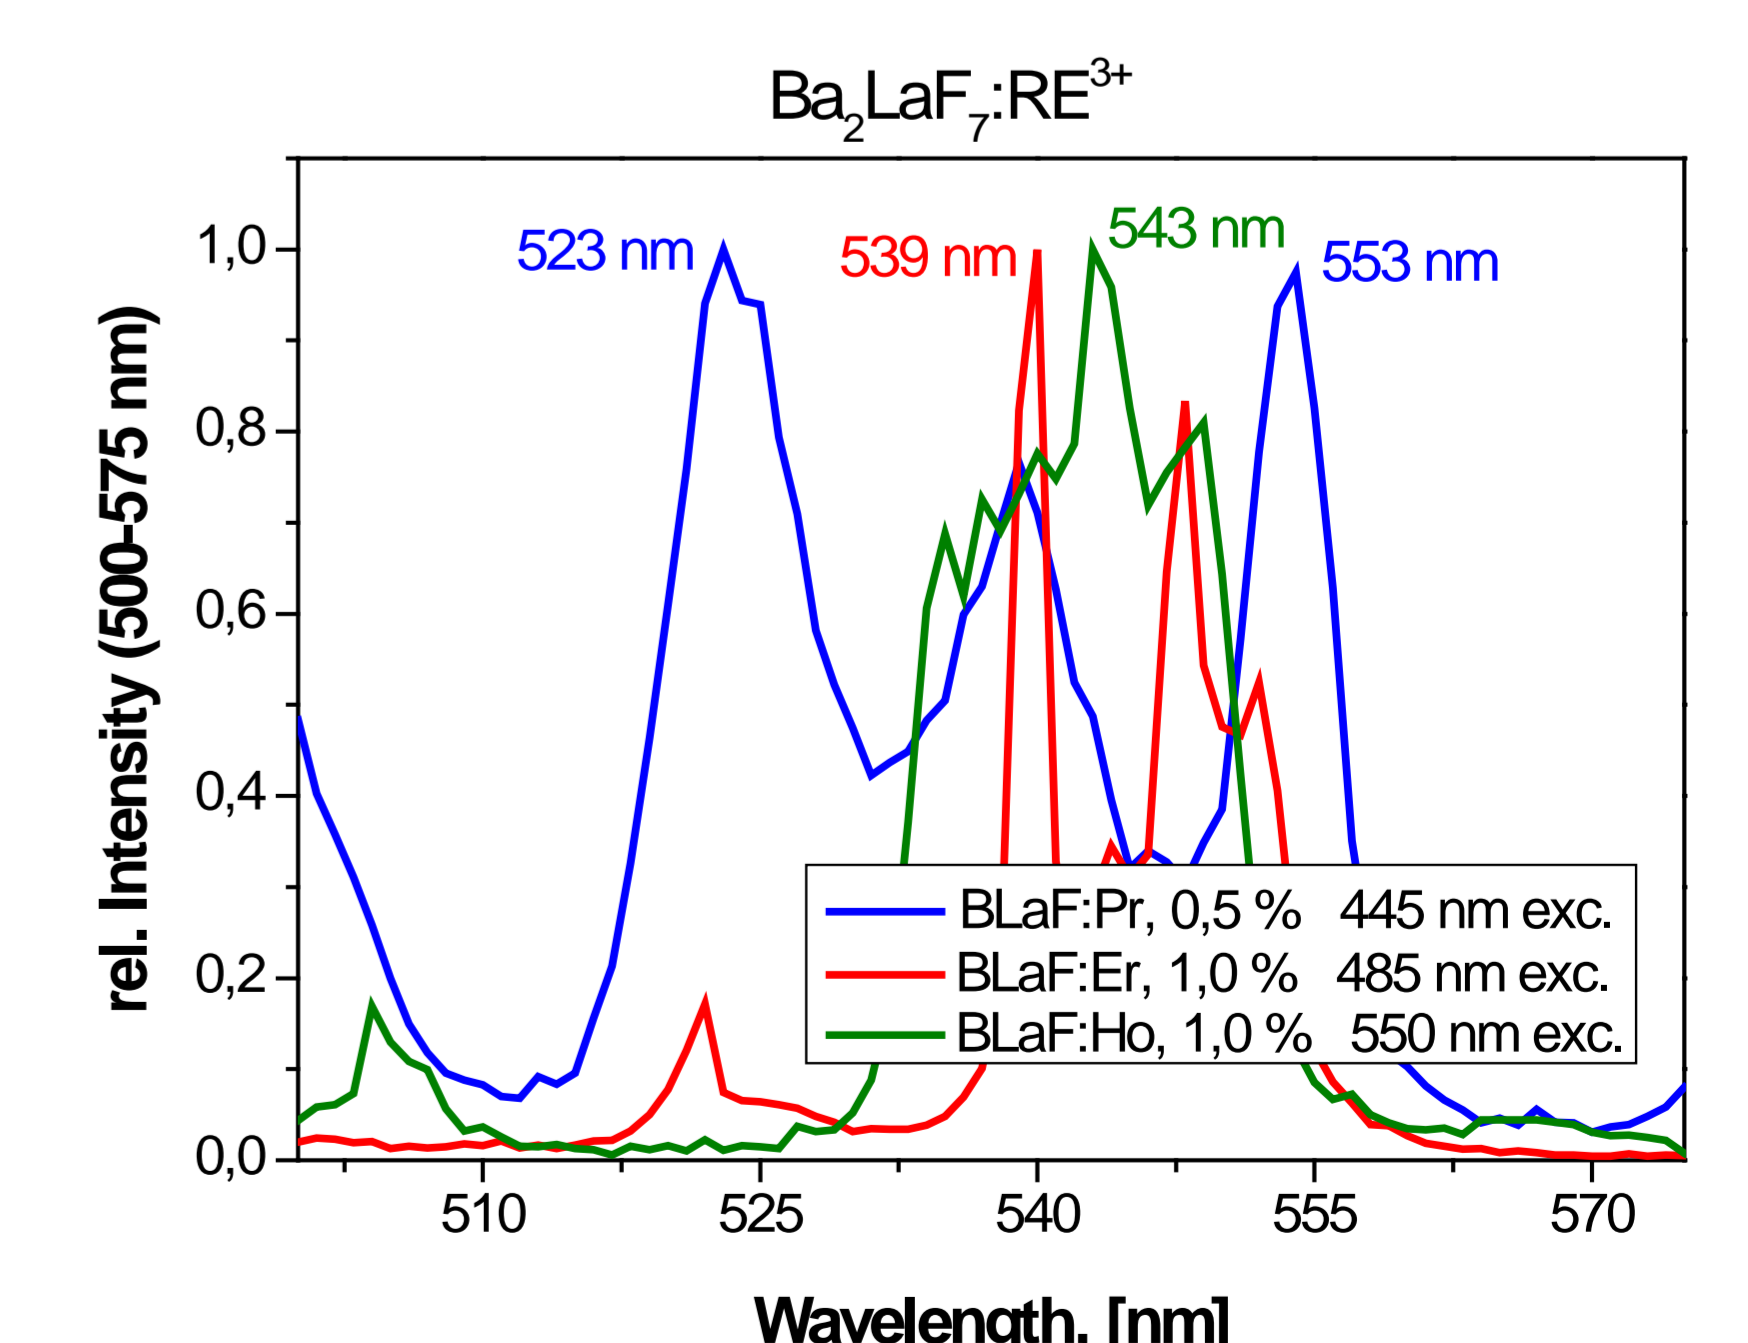

Emission spectra of Ba₂LaF₇:RE³⁺

Conclusion: BLF was doped by 0,5 to 1,0% of Pr³⁺, Ho³⁺, or Er³⁺ and shows for each ion emission in the green spectral range. The most intense emission peak for Ba₂LaF₇:Pr³⁺ appears at 481 nm, for Ba₂LaF₇:Er³⁺ at 538 nm and for Ba₂LaF₇:Ho³⁺ at 544 nm. However, solely Ba₂LaF₇:Pr³⁺ can be excited at 440 nm, which is the required wavelength as given by the diode LASER.